

FCAMPD Amplified RF InGaAs Photodetector

✧ Features

Wide Bandwidth
Incorporated Bias-T
O/E Hybrid Integrated
High Gain, Low Noise, Broadband
SMA Connector



✧ Applications

Radar Information Processing
Electronic Warfare
Antenna Measurement



✧ Introduce of FCAMPD

The FCAMPD is optoelectronic hybrid integrated by broadband InGaAs photodiode and low noise amplifier. The response wavelength of InGaAs PIN photodiode is 1000 to 1650nm. The RF gain of low noise amplifier is 20~30dB.

FCAMPD can provide the bandwidth of 1GHz , 2.5GHz or customization (maximum 5GHz) . The module operates on +5V supply voltages. The optical input port is a standard FC(face-contacted) fiber-optic connector. The RF output port is an SMA compatible connector matched by 50 ohm impedance .

FCAMPD weighs less than 25 grams.


ROHS 2.0 certificated .

✧ Product Selection


Typical & Absolute Maximum Rating				
Parameter	Sym.	Typ	Rating	Unit
Storage temperature range	T _{STG}	-45 ~ +85	-55 ~ +100	℃
Operating case temperature range	T _C	25	-40 ~ +70	℃
Bias Voltage	V _R	+5	+4.75 ~ +5.25	V
Optical Input Power	P _{in}	0	+5	dBm
Burn-out Optical Power	P _B	-	+13	dBm
Lead soldering temperature	T _p	280 (10s)	330 (10s)	℃

Electrical / Optical Characteristics (T _C = 22 ± 3 °C)						
Parameter	Sym	Test Condition		Parameter Values		Unit
Wavelength Range	λ	—		1000 ~ 1650		nm
Frequency Range	—	—		L - Band	S - Band	—
Small Signal Bandwidth	f _{3dB}	T _C = 22 ± 3°C		0. 03 ~ 1	0.03 ~ 2.5	GHz
Responsivity	R _e	V _R =+5V, P _{in} =1mW	λ = 1310 nm	≥ 0.85	≥ 0.85	A/W
			λ = 1550 nm	≥ 0.90	≥ 0.90	
Amplitude Flatness	A	T _C =-40~+70 °C		≤ ± 1.5		dB
Saturation Optical Power	P _s	V _R = +5 V, λ = 1550 nm AC Modulated		+5		dBm
RF Signal Gain	G	—		30 ±2	20 ±2	dB
Saturation RF Output Power	P _{out}	—		15		dBm
Output VSWR	VSWR	—		≤ 2		—
Dark Current	I _D	—		≤10		nA
Output Impedance	R _L	—		50		Ω


✧ Typical Response Curves

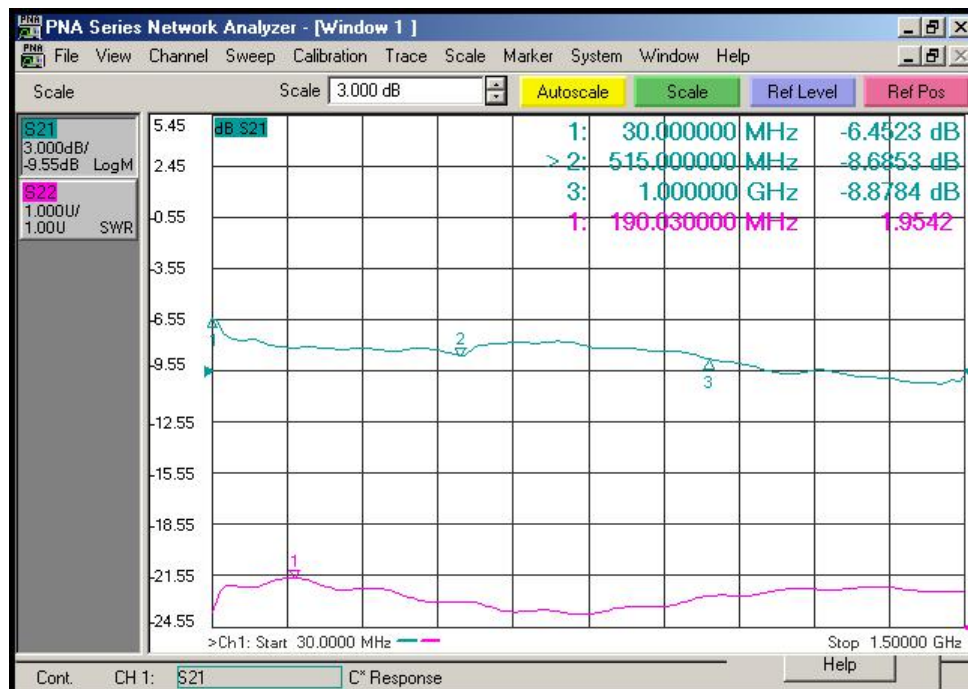

(Fig . 1 L- Band FCAMPD InGaAs Photodetector Frequency Response)

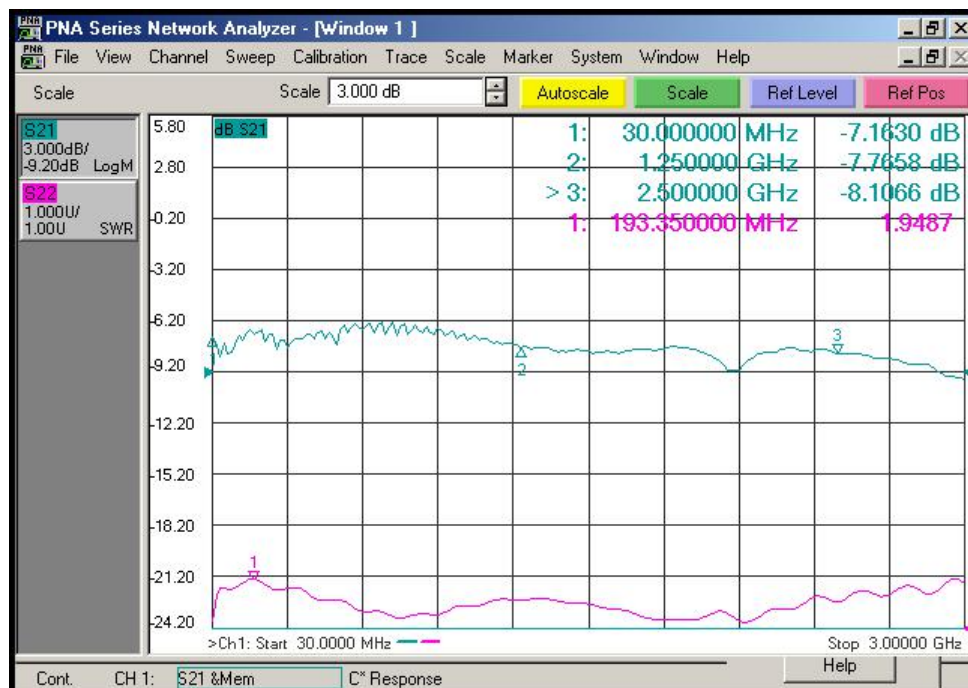


(Fig . 2 S- Band FCAMPD InGaAs Photodetector Frequency Response)

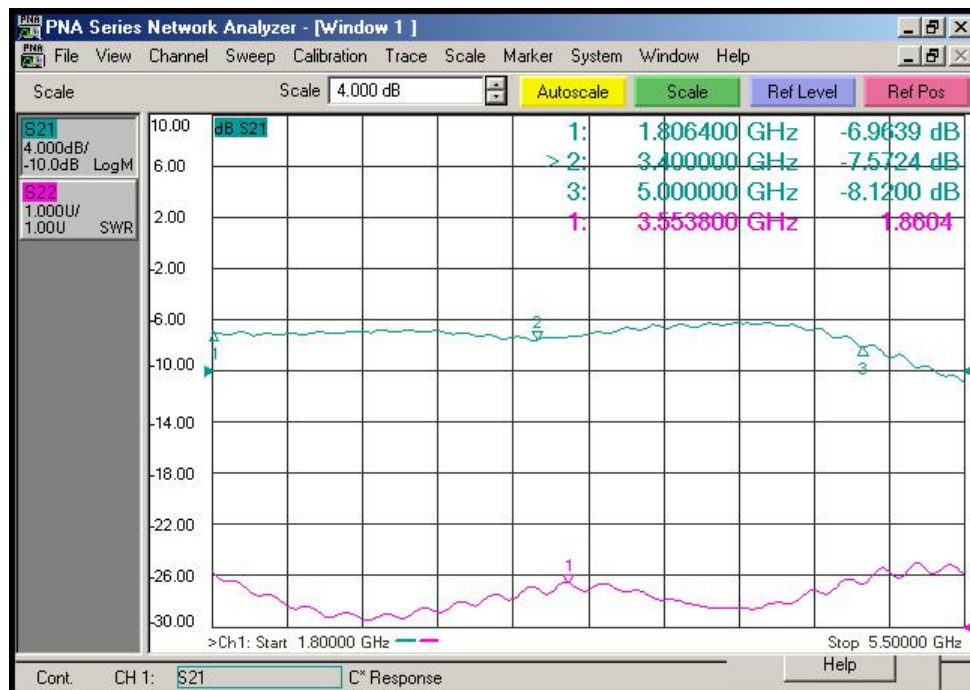

(Fig . 3 C- Band FCAMPD InGaAs Photodetector Frequency Response)

✧ Dimension and Pins (Unit: mm[inch])

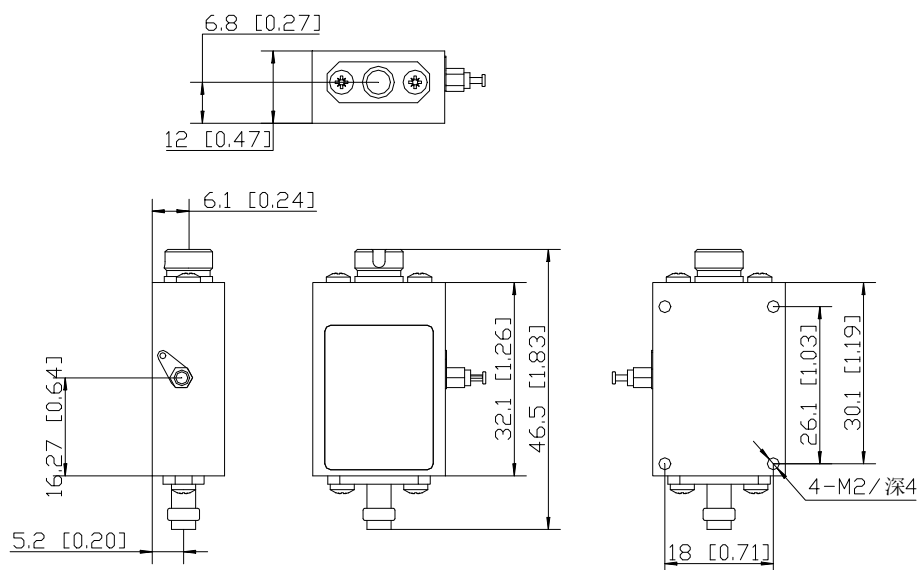

Optical Connector: FC(face-contacted) fiber-optic connector

RF Connector: SMA

✧ Ordering Information

FCAMPD-□

See sheet 1

Sheet 1:

Code	Analog Bandwidth
L	0.03 ~ 1 GHz
S	0.03 ~ 2.5 GHz
CM	Customization (≦ 5GHz)

✧ Precautions

Be sure the fiber coupling facet is clean before connecting it to opto-circuit .

RF interface and optical interface shall be covered with dust cap when not in use.

The suitable ESD protection is required in storage, transportation and using .