


HSPD High Speed InGaAs Photodetector


✧ Features

- Wide Bandwidth
- Incorporated Bias-T
- DC Coupled
- Hermetically Sealed, SMA Connector

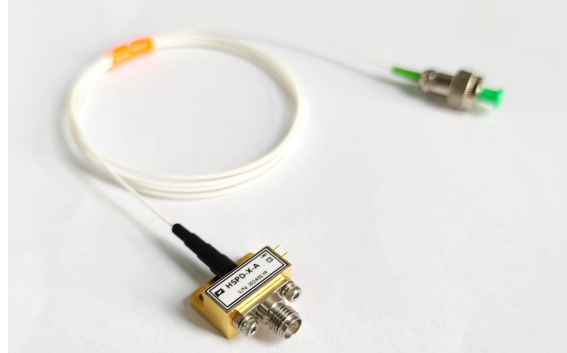

✧ Applications

- High-speed Optical-fiber Communication
- Radar Information Processing
- Electronic Warfare
- High-speed Signal Test and Measurement

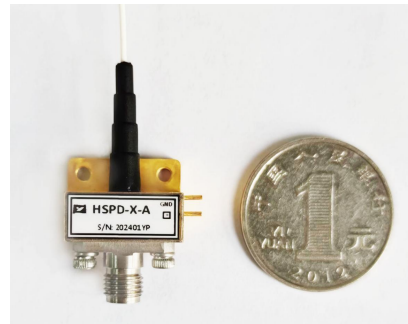

✧ Introduce of HSPD

The HSPD high-speed detector module is designed for both digital and analog applications. The module contains an InGaAs PIN photodiode which response wavelength covers 1250 to 1650 nm and necessary matching electronics.

HSPD can provide the bandwidth of 8 GHz , 12 GHz , 18 GHz , 22 GHz and 30GHz . The module operates on +3.3 or +5V (depend on the model of HSPD) . It complies with a standard single-mode 9/125 μ m fiber input. The RF output port is an SMA compatible connector or 2.92 mm connector matched by 50 ohm impedance .

HSPD is hermetically sealed, and weighs less than 15 grams.

ROHS 2.0 certificated .


✧ Product Selection

Typical & Absolute Maximum Rating				
Parameter	Sym.	Typ	Rating	Unit
Storage temperature range	T _{STG}	-45 ~ +85	-55 ~ +100	°C
Operating case temperature range	T _C	25	-40 ~ +85	°C
Bias Voltage	V _R	3.3 or 5	2.8 ~ 5.25	V
Optical Input Power	P _{in}	+3	+10	dBm
Burn-out Optical Power	P _B	-	+13	dBm
Lead soldering temperature	T _p	280 (10s)	330 (10s)	°C


Electrical / Optical Characteristics (T _C = 22 ± 3 °C)										
Parameter	Sym	Test Condition	Parameter Values						Unit	
Wavelength Range	λ	—	1000~1650						nm	
Frequency Range	—	—	C-Band	X-Band	Ku-Band	Ku ⁺ -Band	K ⁺ -Band	PLUS	—	
Small Signal Bandwidth	f _{3dB}	T _C = 22 ± 3°C	0.1~8	0.3~12	0.8~18	2~22	2~30	0.3~18	GHz	
Responsivity	R _e	V _R , P _{in} =1mW	λ = 1310nm	≥ 0.85	≥ 0.85	≥ 0.8	≥ 0.75	≥ 0.75	≥ 0.75	A/W
			λ = 1550nm	≥ 0.95	≥ 0.95	≥ 0.75	≥ 0.70	≥ 0.65	≥ 0.70	
Amplitude Flatness	A	T _C = -40~+85 °C	≤ ±1.5	≤ ±1.5	≤ ±1.5	≤ ±2	≤ ±2	≤ ±1.5	dB	
Output VSWR	VSWR	—	≤ 2	≤ 2	≤ 2.5	≤ 2.5	≤ 2.5	≤ 2.5	—	
Bias Voltage	V _R	—	+3.3	+3.3	+3.3	+3.3	+5	+5	V	
RF Connector	—	—	SMA	SMA	SMA	2.92mm	2.92mm	SMA	—	
Saturation Optical Power	P _s	V _R , λ = 1550nm AC Modulated	+7	+7	+7	+7	+7	+10	dBm	
Dark Current	I _d	V _R	≤ 10	≤ 10	≤ 10	≤ 10	≤ 10	≤ 10	nA	
Saturation RF Output Power	P _{out}	—	-10						dBm	
Output Impedance	R _L	—	50						Ω	

✧ Typical Response Curves


(V_R , $\lambda=1550\text{nm}$, $TC=25\text{ }^\circ\text{C}$, $P_{in}=0\text{dBm}$)

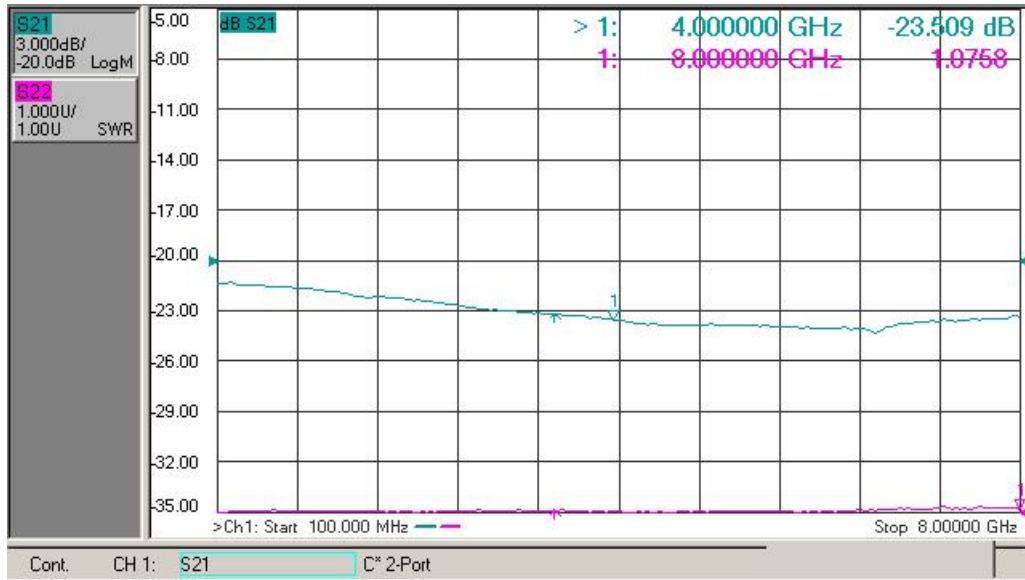


(Fig.1 C-Band Photodetector Frequency Response)

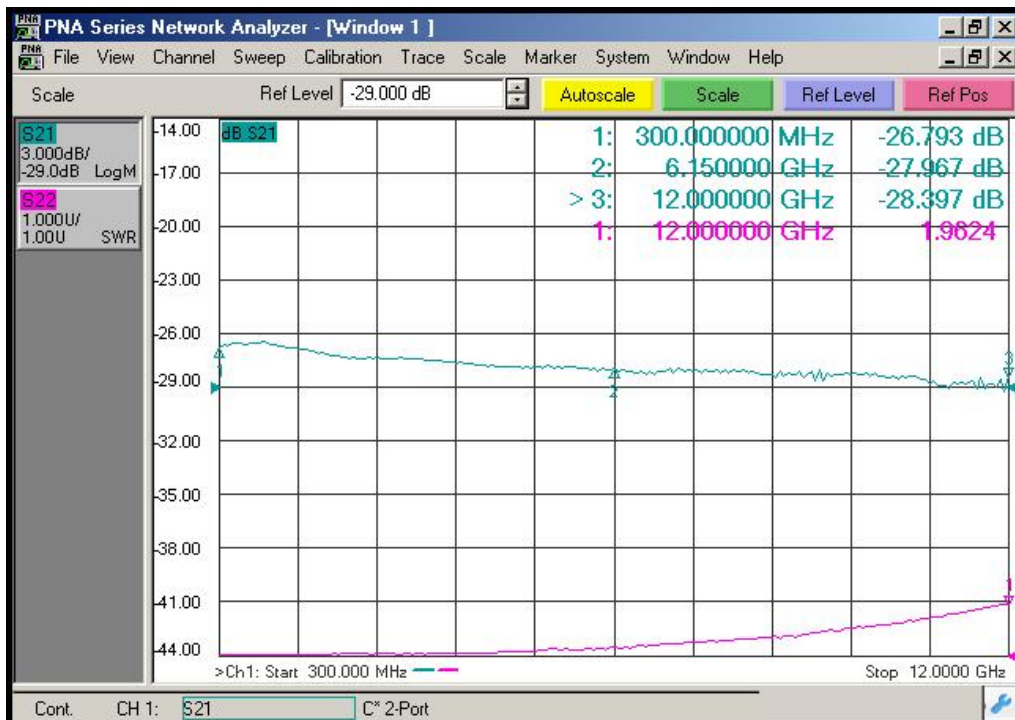

(Fig.2 X-Band Photodetector Frequency Response)

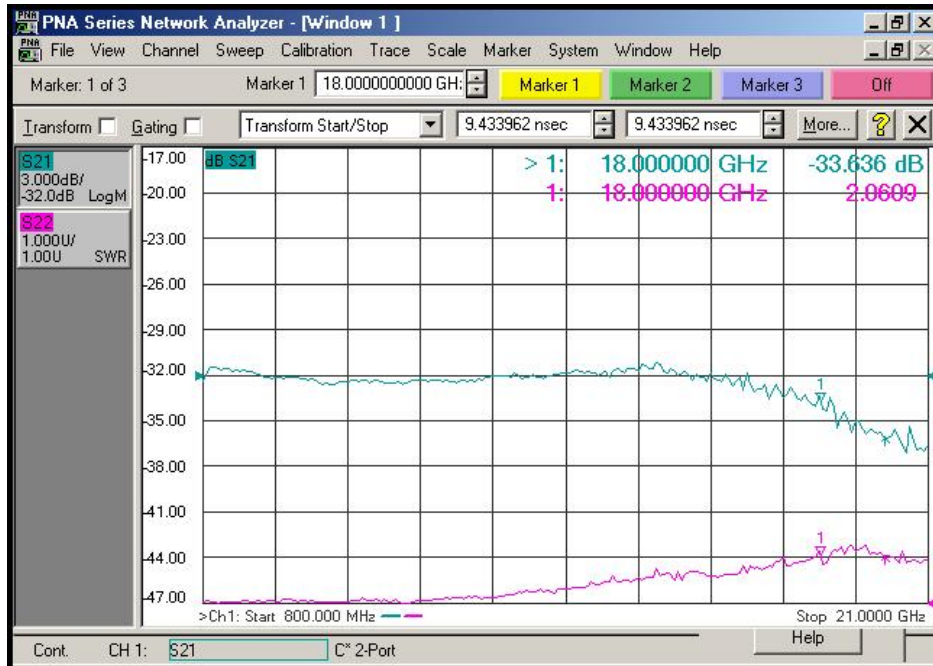


(Fig.3 Ku-Band Photodetector Frequency Response)

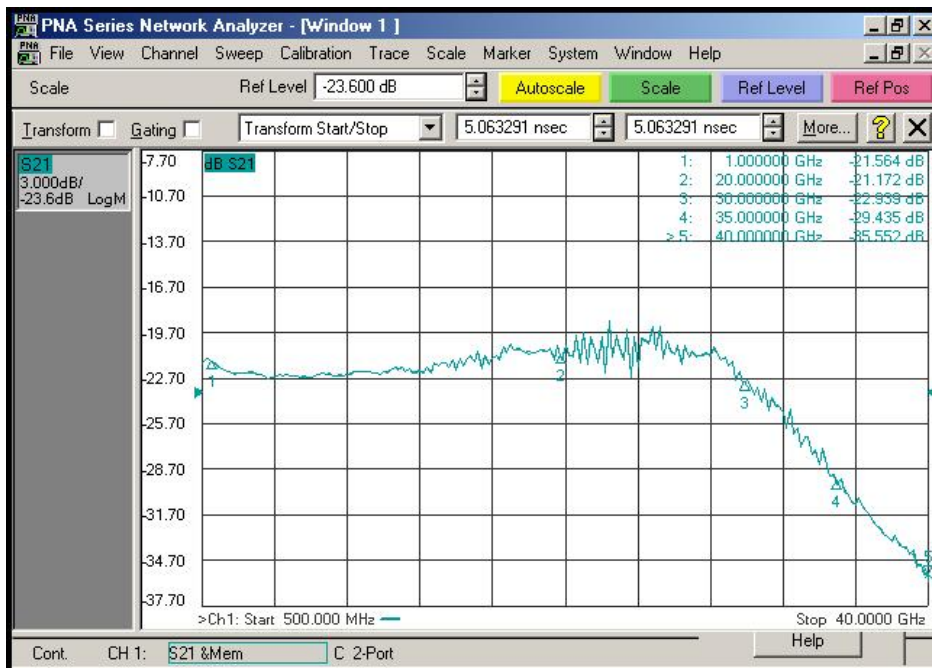


(Fig.4 K⁺-Band Photodetector Frequency Response)

✧ **Dimension and Pins (Unit:mm[inch])**

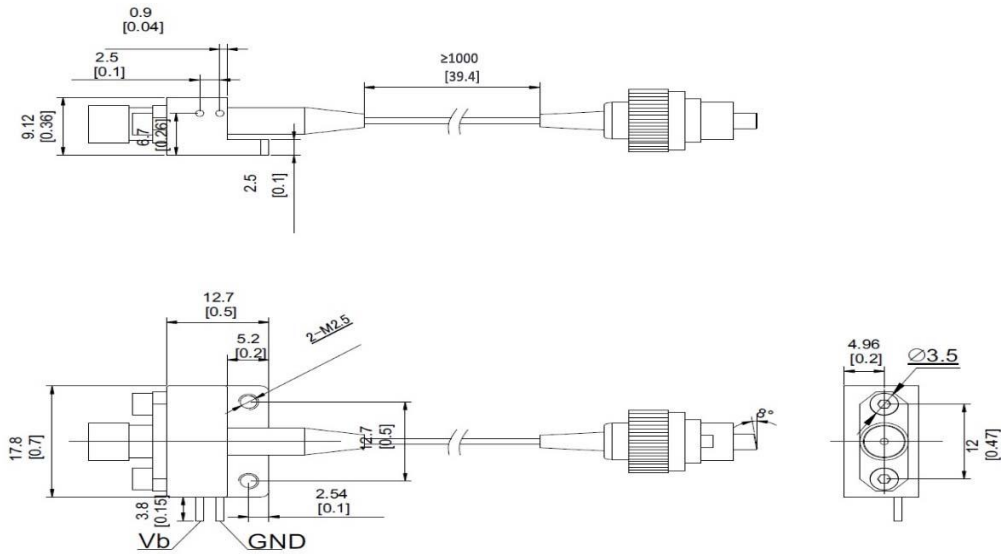

RF Connector: SMA or 2.92mm

✧ **Ordering Information**



Sheet 1:

Code	Analog Bandwidth
C	0.1 ~ 8GHz
X	0.3 ~ 12 GHz
Ku	0.8 ~ 18 GHz
Ku ⁺	2 ~ 22 GHz
K ⁺	2 ~ 30 GHz
Plus	0.3 ~ 18 GHz

Sheet 2:

Code	Connector Type	Remark
N	No Connector	Single-mode 9/125 μm fiber pigtail
A	FC/APC	
P	FC/PC	

✧ **Precautions**

- The fiber bending radius no less than 20mm for avoiding fiber damaged .
- Be sure the fiber coupling facet is clean before connecting it to opto-circuit .
- The suitable ESD protection is required in storage, transportation and using .